

SPECIFICATIONS

Thermodynamic Cycle		Diesel 4 stroke
Air Handling		TCA
Arrangement		3L
Bore x Stroke	millimeters	94 x 107
Total displacement	liters	2.2
Valves per cylinder	number	0.002
Cooling System		liquid
Direction of Rotation (viewed facing flywheel)		CCW
Compression ratio		17.5:1
Injection System		ECR
EGR		-

PERFORMANCES

Rated power [*]	kW (HP) @ rpm	45 (60) @ 2600
Peak torque	Nm (kgm) @ rpm	208 (21) @ 1800
High idle speed	rpm	-
Low idle speed	rpm	-
Minimum starting temperature without auxiliaries	°C	-30°
Oil and oil filter maintenance interval for replacement	hours	300

STANDARD CONFIGURATION

Flywheel housing	type	SAE 4 / SAE 5
Flywheel size	inch	11"
Intake manifold location		high / right side
Exhaust manifold location		high / right side
Turbocharger		Fixed Geometry Turbo
Turbocharger location		Top / right side
Fan transmission ratio		-
Distance between fan - crankshaft centers	millimeters	X=- Y=-
Fuel filter	number	e with water separator - left side
Fuel prefilter		-
Fuel Pump		-
Oil filter	number	single cartridge - left side
Oil sump		30° angularity limits longitudinal with flywheel in high position
Oil vapours blow-by circuit		CCV with oil separator
Oil heat exchanger		-
Oil filler		On valve cover
Starter		12V - 2 kW
Alternator		12 V - 75 A, 90 A
Engine stop device		-
Wiring harness		-
Painting color		grey
Lift Pump		-
Hydraulic steering pump	liters/min	-
Maximum torque available from crankshaft pulley	Nm	-

WEIGHT AND DIMENSIONS


Dimensions	LxWxH (mm)	580 x 524 x 723
Dry Weight	Kg	240

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER & TORQUE

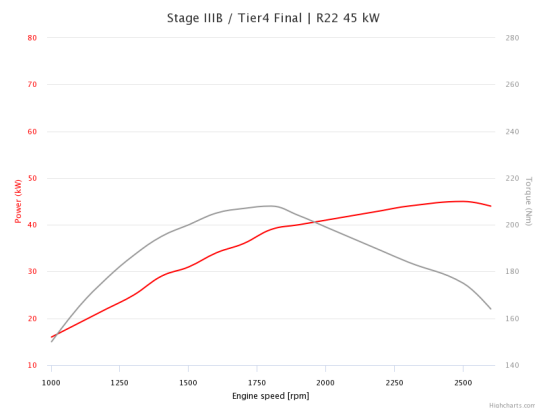

NOT INCLUDED IN STANDARD CONFIGURATION

Power Take Off (PTO)		-
PTO - transmission ratio		1.136:1
PTO - maximum available torque	n SAE A / Group 2 drive - Constant Load	66 Nm
Battery - minimum capacity recommended	Ah	100 Ah (12V)
Battery - minimum cold cranking capacity recommended	Ah	12 V - 690 Ah

LEGEND

Arrangement	Air Handling	Turbocharger	Injection System	Exhaust System
L (in line)	TCA (Turbocharged with aftercooler)	WG (Wastegate)	M (Mechanical)	EGR (Exhaust Gas Recirculation)
V (90° "V" configuration)	TC (Turbocharged)	VGT (Variable Geometry Turbocharger)	ECR (Electronic Common Rail)	SCR (Selective Catalytic Reduction)
	NA (Naturally Aspirated)	TST (Twin Stage Turbocharge)	EUI (Electronic Unit Injector)	
			MPI (Multi Point Injection)	


FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE



AFTER TREATMENT SYSTEM

After Treatment System includes Diesel Oxidation Catalyst (DOC) and Particulate Matter Catalyst (PM-CAT)

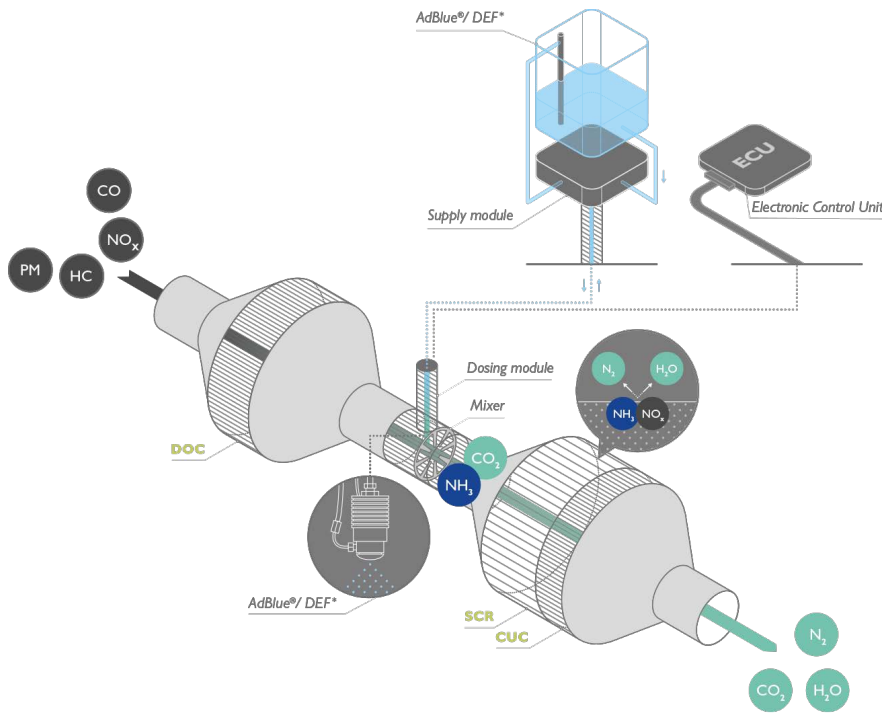

ELEMENT

- 1 DIESEL OXIDATION CATALYST
- 2 ADBLUE® / DEF INJECTION
- 3 SELECTIVE CATALYTIC REDUCTION ON FILTER
- 4 CLEAN-UP CATALYST

LEGEND

PM Particulate Matter
 HC unburnt Hydrocarbons
 NO_x Nitrogen Oxides
 CO Carbon Monoxide
 N₂ Nitrogen
 CO₂ Carbon Dioxide
 H₂O Water
 AdBlue®/ DEF = CO(NH₂)₂ + H₂O

AGRICULTURAL

LEGEND

Arrangement	Air Handling	Turbocharger	Injection System	Exhaust System
L (in line)	TCA (Turbocharged with aftercooler)	WG (Wastegate)	M (Mechanical)	EGR (Exhaust Gas Recirculation)
V (90° "V" configuration)	TC (Turbocharged)	VGT (Variable Geometry Turbocharger)	ECR (Electronic Common Rail)	SCR (Selective Catalytic Reduction)
	NA (Naturally Aspirated)	TST (Twin Stage Turbocharge)	EUI (Electronic Unit Injector)	
			MPI (Multi Point Injection)	

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

